



January 17, 2001

State of Utah
Division of Oil, Gas & Mining
Attention: Lisha Cordova
1594 West North Temple, Suite 1210
Salt Lake City, Utah 84114-5801

Bureau of Land Management
Attention: Ed Forsman
170 South 500 West
Vernal, Utah 84026


Dear Ed Forsman and Lisha Cordova:

Please find enclosed is the APD for the following well location:

Ute Tribal #3-36
Federal #35-190
Serawop #34-161
NBU #318
Federal #33-177

If you have any questions please feel free to contact me @ (435)-781-7023.

Sincerely,


Cheryl Cameron
Sr. Regulatory Analyst

SU/CC/WF

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

Coastal Oil & Gas Corporation

A SUBSIDIARY OF THE COASTAL CORPORATION
1368 S 1200 E • P.O. BOX 1148 • VERNAL UT 84078 • 435/789-4433 • FAX 435/789-4436

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0136
Expires: November 30, 2000


001 APPLICATION FOR PERMIT TO DRILL OR REENTER


1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 14-20-H62-4908
1b. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute
2. Name of Operator Coastal Oil & Gas Corporation		7. Unit or CA Agreement Name and No. N/A
3a. Address P.O. Box 1148, Vernal, UT 84078	3b. Phone No. (include area code) (435) 781-7023	8. Lease Name and Well No. Ute Tribal #3-36
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface NE/NW At proposed prod. zone 82' FNL & 1714' FWL		9. API Well No. N/A 43-047-33867
10. Field and Pool, or Exploratory Leland Bench Windy Ridge East Field		11. Sec., T., R., M., or Blk. and Survey or Area Sec. 36, T4S, R1E
14. Distance in miles and direction from nearest town or post office* 13.9 Miles Southeast of Ft. Duchesne, UT		12. County or Parish Uintah
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 390'		13. State UT
16. No. of Acres in lease 320		17. Spacing Unit dedicated to this well 40
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Refer to Topo C		20. BLM/BIA Bond No. on file BLM U-605382-9 BIA 114066-A
19. Proposed Depth 15,000'		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5200.9' Ungraded
22. Approximate date work will start* Upon Approval		23. Estimated duration To Be Determined

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Cheryl Cameron	Date 1/16/01
---	---	------------------------

Sr. Regulatory Analyst Approved by (Signature) 		Name (Printed/Typed) BRADLEY G. HILL	Date 02-05-01
Title		Office RECLAMATION SPECIALIST III	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on Reverse)

**Federal Approval of this
Action is Necessary****RECEIVED****JAN 17 2001****DIVISION OF
OIL, GAS AND MINING**

NE Cor Sec 26
Set Stone, 5/8"
Rebar, U.E.L.S.
Alum. Cap

S 1/4 Cor Sec
26, Set Marked
Stone, Pile of
Stones

N89°36'26"W
2636.56' (Meas.)

Section Corner
Re-Established by
Double Proportion
Method (Not Set)

Set Marked Stone,
Pile of Stones

T4S, R1E, U.S.B.&M.

Set Sandstone,
Pile of Stones,
Alum. Cap #138394
on 3/4" Rebar

S89°42'48"W 2652.61' (Meas.)

S89°45'W - 40.395 (G.L.O.)

UTE TRIBAL #3-36

Elev. Ungraded Ground = 5201'

**R
1
E**

36

LOT 4

LOT 3

LOT 2

LOT 1

T4S

WEST - 80.00 (G.L.O.)

T5S

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

NOTE:
BASIS OF BEARINGS IS THE WEST LINE
OF THE SW 1/4 OF SECTION 26, T4S,
R1E, U.S.B.&M. WHICH IS ASSUMED FROM
G.L.O. INFORMATION TO BEAR N00°02'W.

LATITUDE = 39°05'56"


LONGITUDE = 109°50'01"

COASTAL OIL & GAS CORP.

Well location, UTE TRIBAL #3-36, located
as shown in the NE 1/4 NW 1/4 of Section
36, T4S, R1E, U.S.B.&M., Uintah County,
Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT THE NORTHWEST CORNER OF
SECTION 26, T4S, R1E, U.S.B.&M. TAKEN FROM THE
UTELAND BUTTE QUADRANGLE, UTAH, UINTAH COUNTY,
7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED
BY THE UNITED STATES DEPARTMENT OF THE INTERIOR,
GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS
BEING 5188 FEET.

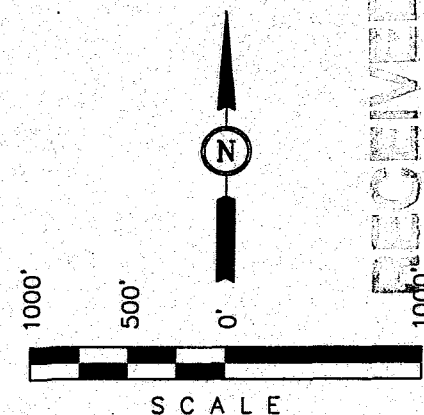

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM
FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE
BEST OF MY KNOWLEDGE AND BELIEF.

Robert L. Hay
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-00-00	DATE DRAWN: 06-03-00
PARTY J.F. B.H. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE COASTAL OIL & GAS CORP.	

Ute Tribal #3-36
NE/NW SEC.36, T4S, R1E
UINTAH COUNTY, UTAH
Lease #14-20-H62-4908

ONSHORE ORDER NO. 1
COASTAL OIL & GAS CORPORATION

DRILLING PROGRAM

1. Geologic Surface Formation:

Top of Green River 0'-2300'

2. Estimated Tops/Depths of Important Geologic Markers/Anticipated Gas:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Oil/Gas	Green River	2265'
Oil/Gas	Wasatch	5990'
Oil/Gas	Mesaverde	9980'
Oil/Gas	Mancos	12670'
	TD	12700'

3. Pressure Control Equipment (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP, one 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure rating.

The hydrill will be tested to 1,500 psi. The rams, choke manifold, kelly safety valves, drill string safety valves, and inside BOP will be tested to 2,000 psi.

4. Proposed Casing & Cementing Program:

The Surface casing and the Production casing will be new.

Please refer to the attached Casing & Cementing Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Fluids Program.

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

6. **Evaluation Program:** (Logging)

Refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure (TD @ 12,700') approximately equals 5,080 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 2,286 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

None anticipated.

10. **Other:**

A Class III Archaeological Study was conducted for this location and submitted to the Ute Indian Tribe prior to on-site.

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

**Ute Tribal #3-36
NE/NW SEC.36, T4S, R1E
UINTAH COUNTY, UTAH
Lease #14-20-H62-4908**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

To reach the proposed location: Proceed in a southerly direction from Ft. Duchesne, UT approximately 4.0 miles to the junction of this road and an existing road to the south; proceed in a southerly direction approximately 6.1 miles to the junction of this road and an existing road to the south; proceed in a southerly then southwesterly direction approximately 3.8 miles to the junction of this road and an existing road to the southeast; proceed in a southeasterly direction approximately 0.5 miles to the #26-5-J and the beginning of the proposed access to the southeast; follow road flags in a southeasterly direction approximately 0.9 miles to the proposed location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

0.9 mile of access road is proposed. Refer to Topo Map B.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Juniper Green as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

If a plastic reinforced liner is used, it will be a minimum of 12 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Refer to Topo Map D for the location of the proposed pipeline.

8. **Ancillary Facilities:**

None are anticipated.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

It was determined that a pit liner will be used during the on-site inspection. The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Corners shall be rounded as needed in order to control drainage.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Culvert(s) shall be installed where necessary.

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

10. Plans for Reclamation of the Surface:*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

If a plastic, nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

The pit topsoil shall be piled separately on the east side of the reserve pit.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

11. Surface Ownership:

Ute Indian Tribe
P.O. Box 70
Ft. Duchesne, UT 84026
(435) 722-5141

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

13. Lessee's or Operators's Representative & Certification:

Cheryl Cameron
Sr. Regulatory Analyst
Coastal Oil & Gas Corporation
P.O. Box 1148
Vernal, UT 84078
(435) 781-7023

Darrell Molnar
Drilling Manager
Coastal Oil & Gas Corporation
9 Greenway Plaza, Suite 2775
Houston, TX 77046
(713) 418-4295

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.


The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Coastal Oil & Gas Corporation is considered to be the operator of the subject well. Coastal Oil & Gas Corporation agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by Coastal Oil & Gas Corporation Bond #102103, BLM Nationwide Bond #U-605382-9.

RECEIVED
JAN 17 2001
DIVISION OF
OIL, GAS AND MINING

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Cheryl Cameron


1/16/01

Date

RECEIVED

JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

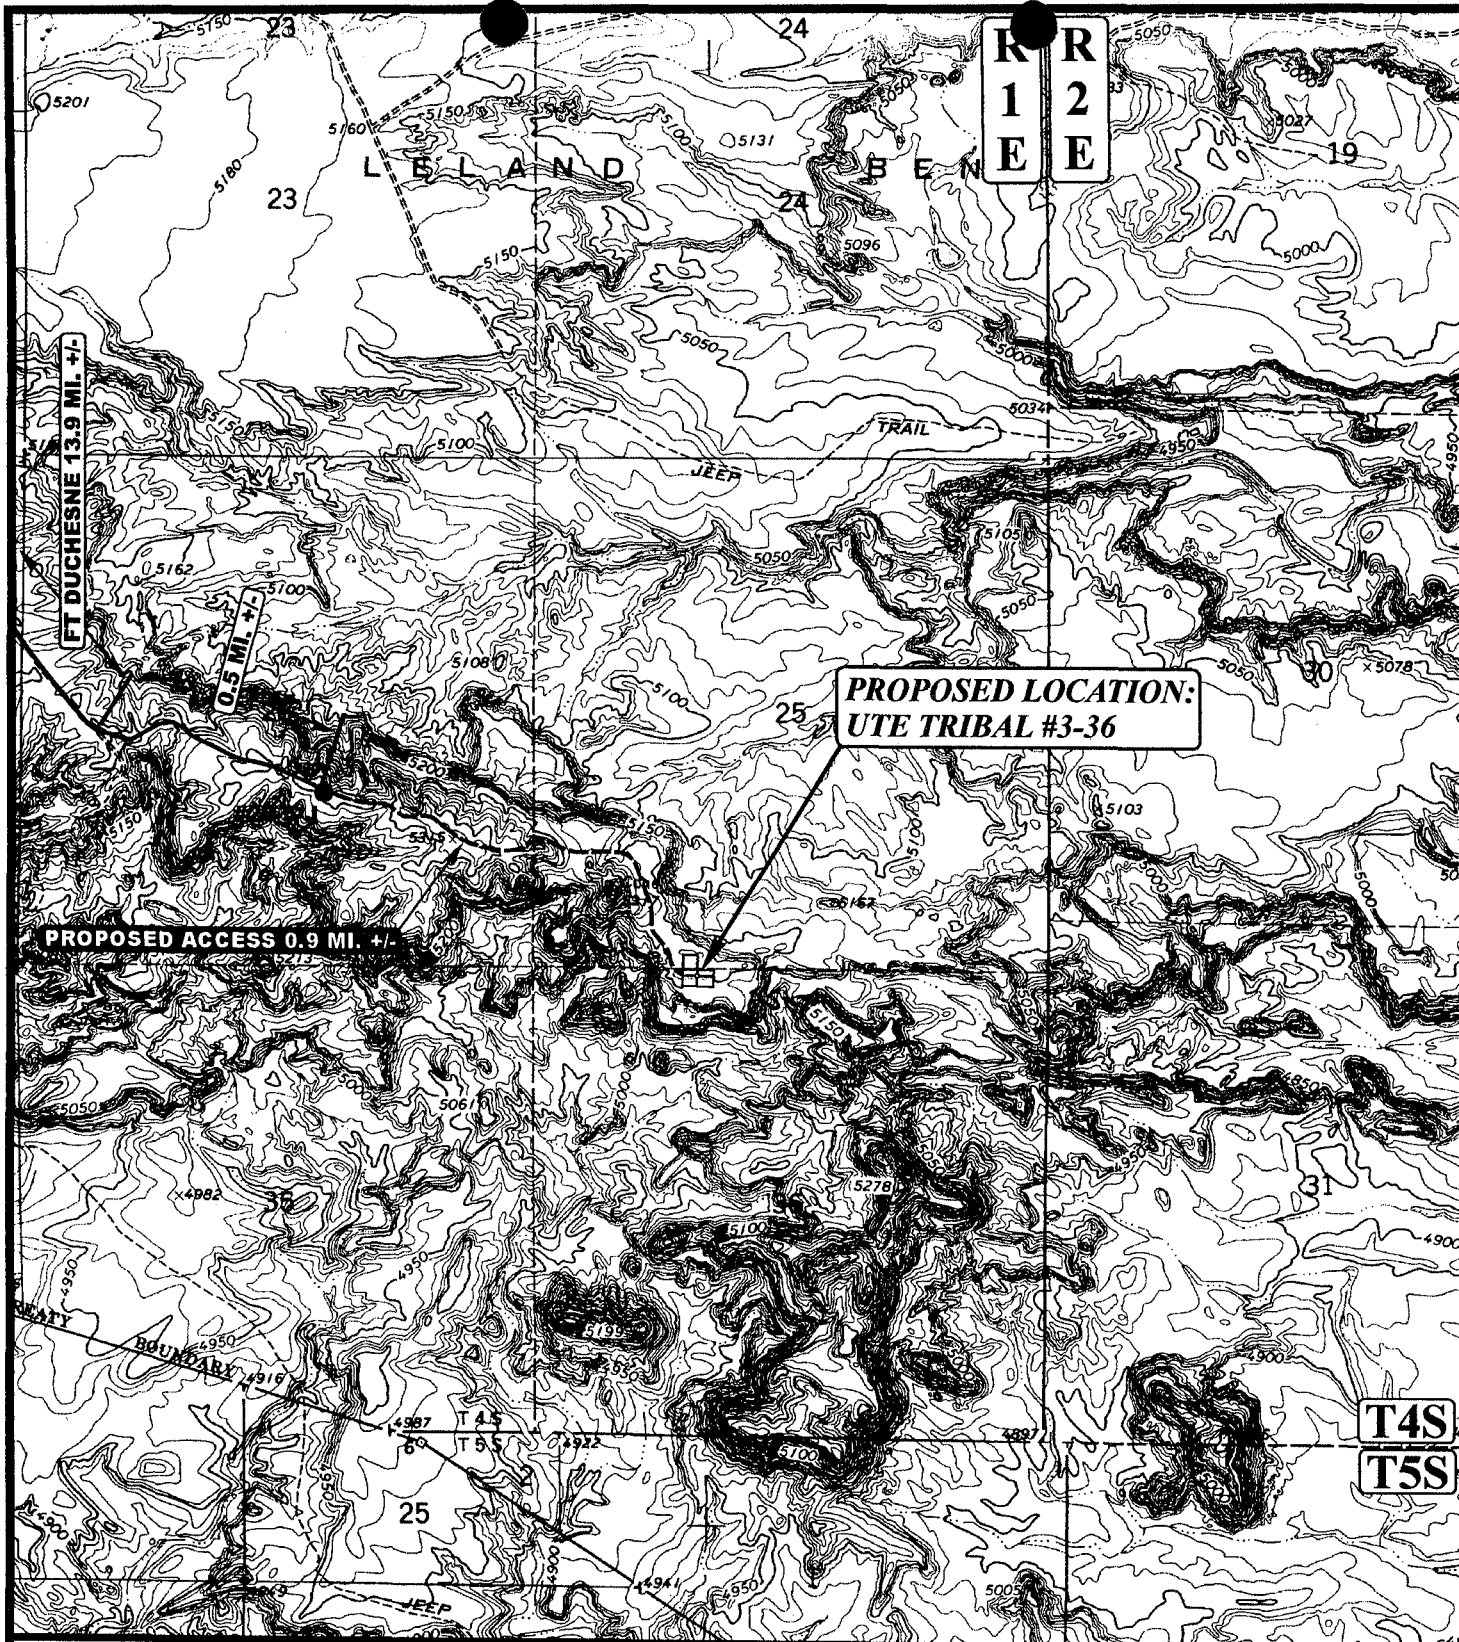

LEGEND:

----- PROPOSED ACCESS ROAD
 _____ EXISTING ROAD



COASTAL OIL & GAS CORP.

UTE TRIBAL #3-36
SECTION 36, T4S, R1E, U.S.B.&M.
84' FNL 1714' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

6 **20** **00**
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.G. REVISED: 00-00-00

B
 TOPO

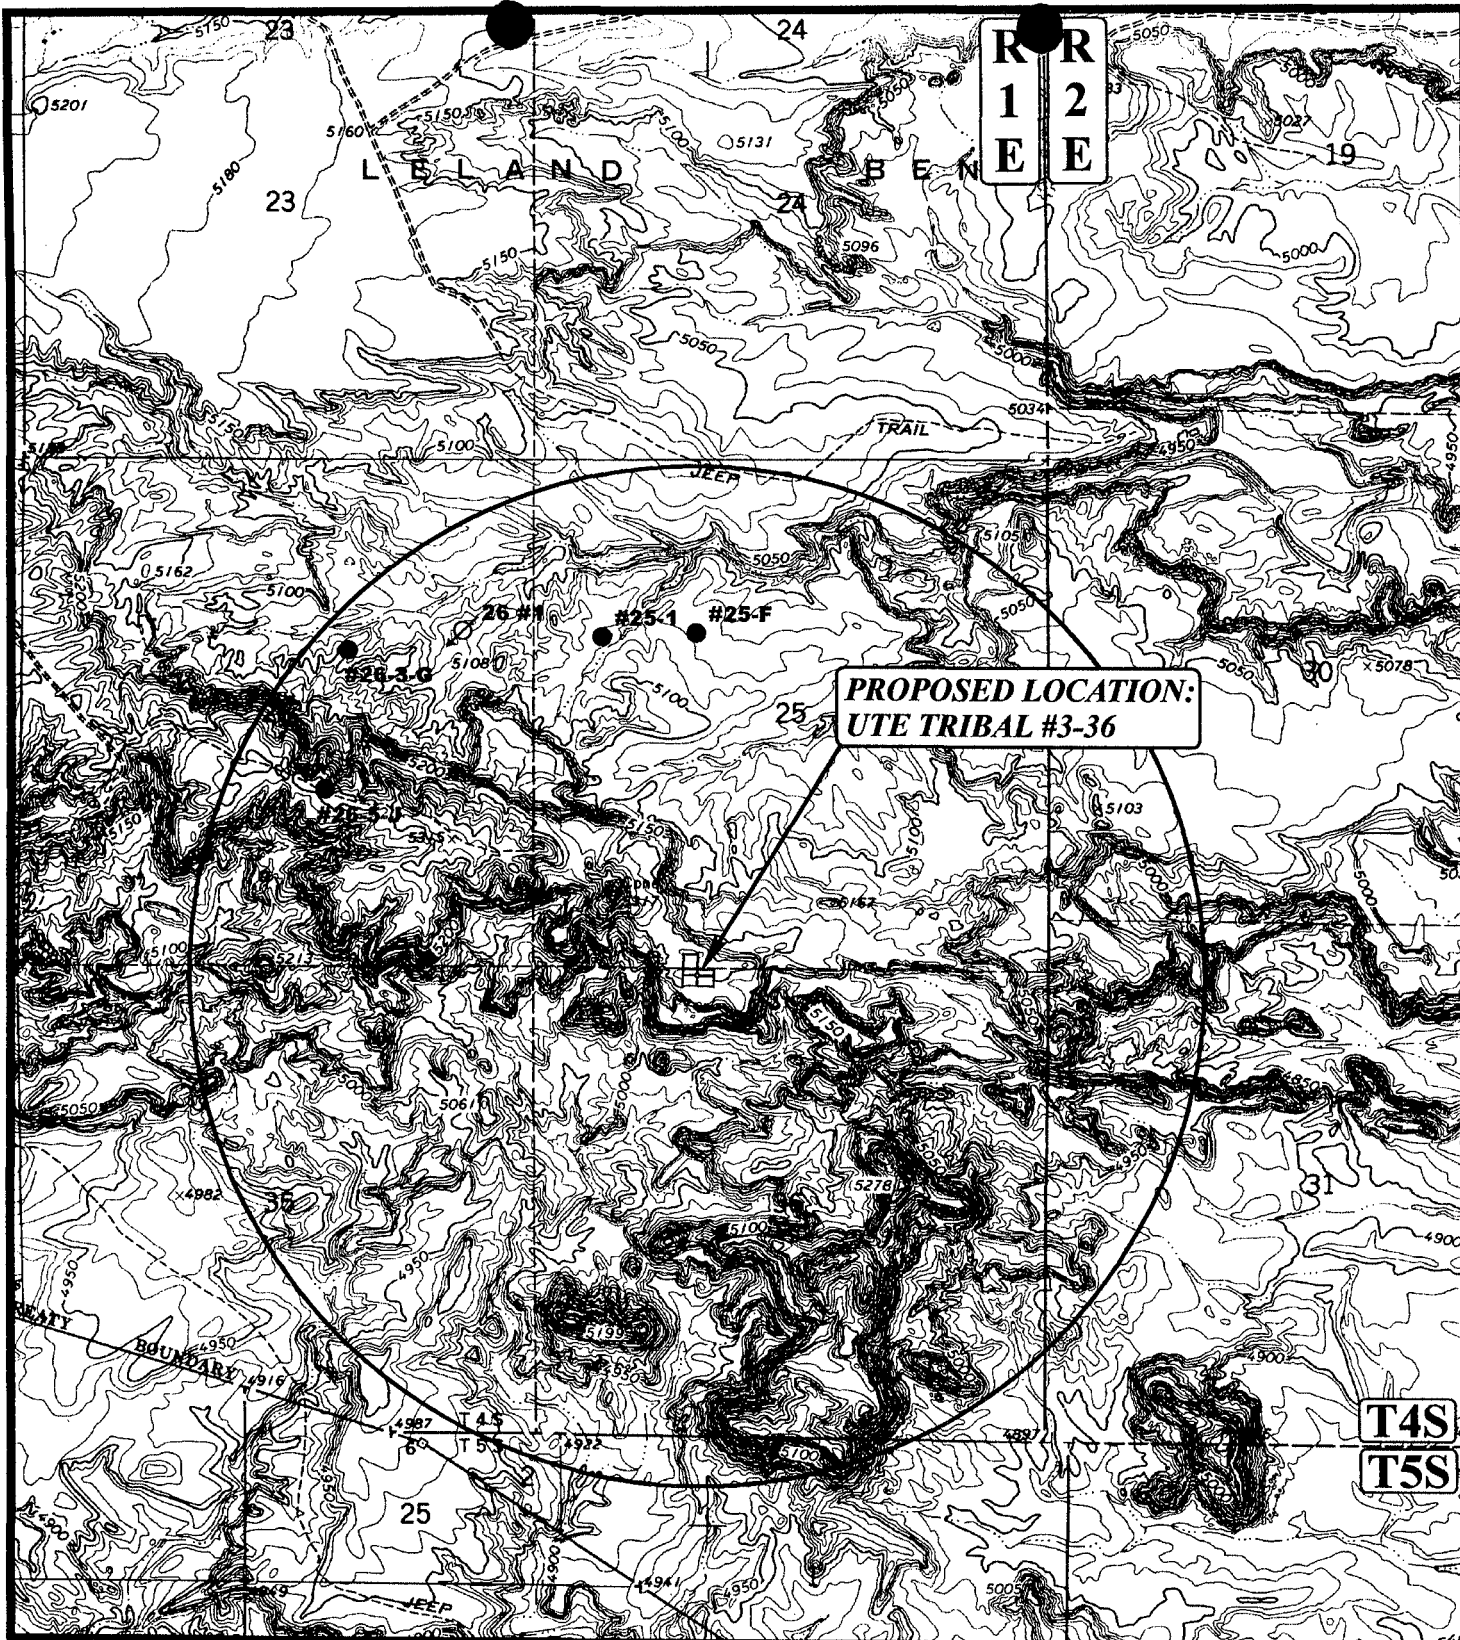

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



COASTAL OIL & GAS CORP.

UTE TRIBAL #3-36
SECTION 36, T4S, R1E, U.S.B.&M.
84' FNL 1714' FWL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

6 20 00
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.G. REVISED: 00-00-00



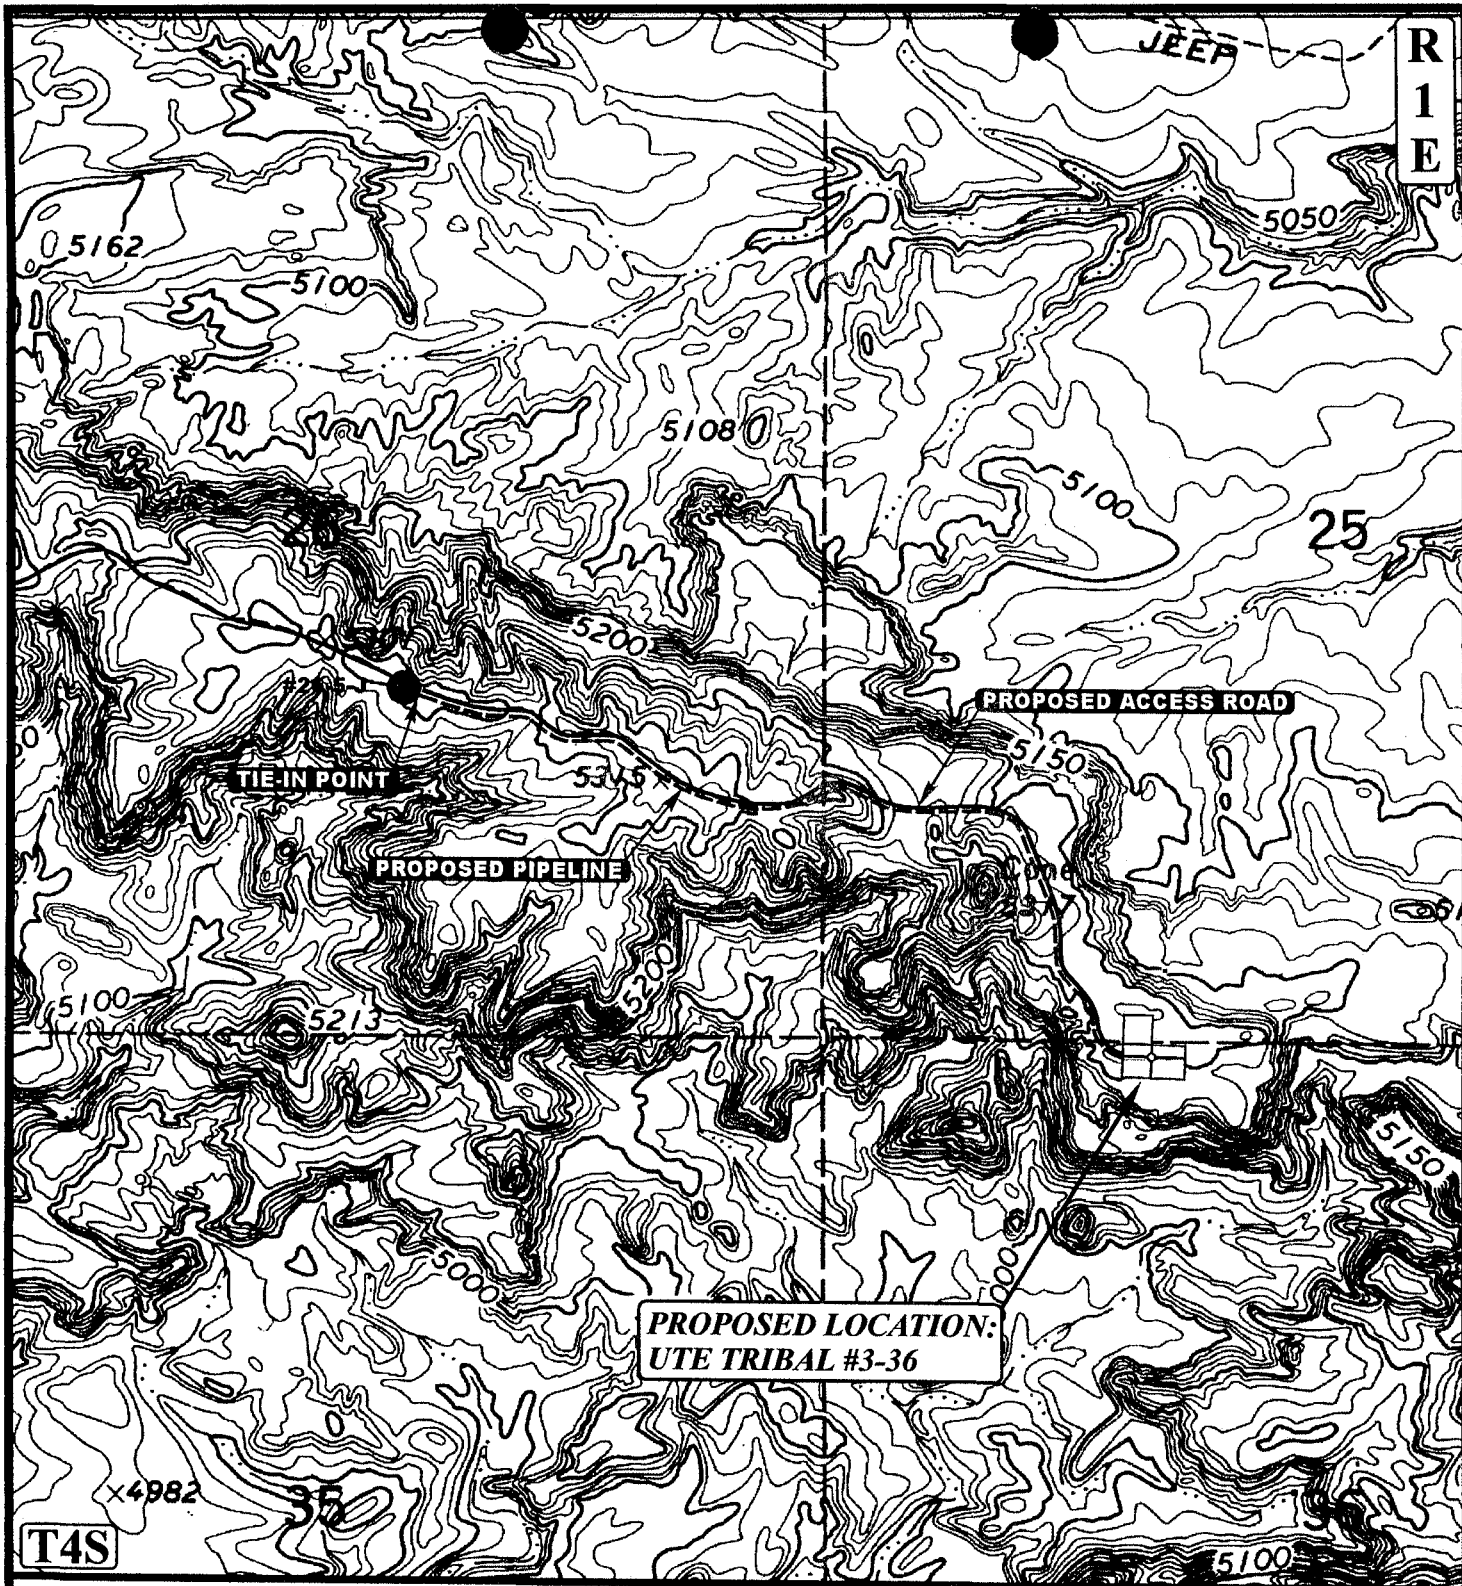

APPROXIMATE TOTAL PIPELINE DISTANCE = 4789' +/-

LEGEND:

- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- PROPOSED ACCESS

COASTAL OIL & GAS CORP.

UTE TRIBAL #3-36

SECTION 36, T4S, R1E, U.S.B.&M.

84' FNL 1714' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

6 2000
MONTH DAY YEAR

SCALE: 1" = 1000'

DRAWN BY: C.G.

REVISED: 00-00-00


**D
TOPO**

COASTAL OIL & GAS CORP.

FIGURE #1

LOCATION LAYOUT FOR


UTE TRIBAL #3-36
SECTION 36, T4S, R1E, U.S.B.&M.
84' FNL 1714' FWL



SCALE: 1" = 50'
DATE: 06-03-00
Drawn By: D.R.B.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

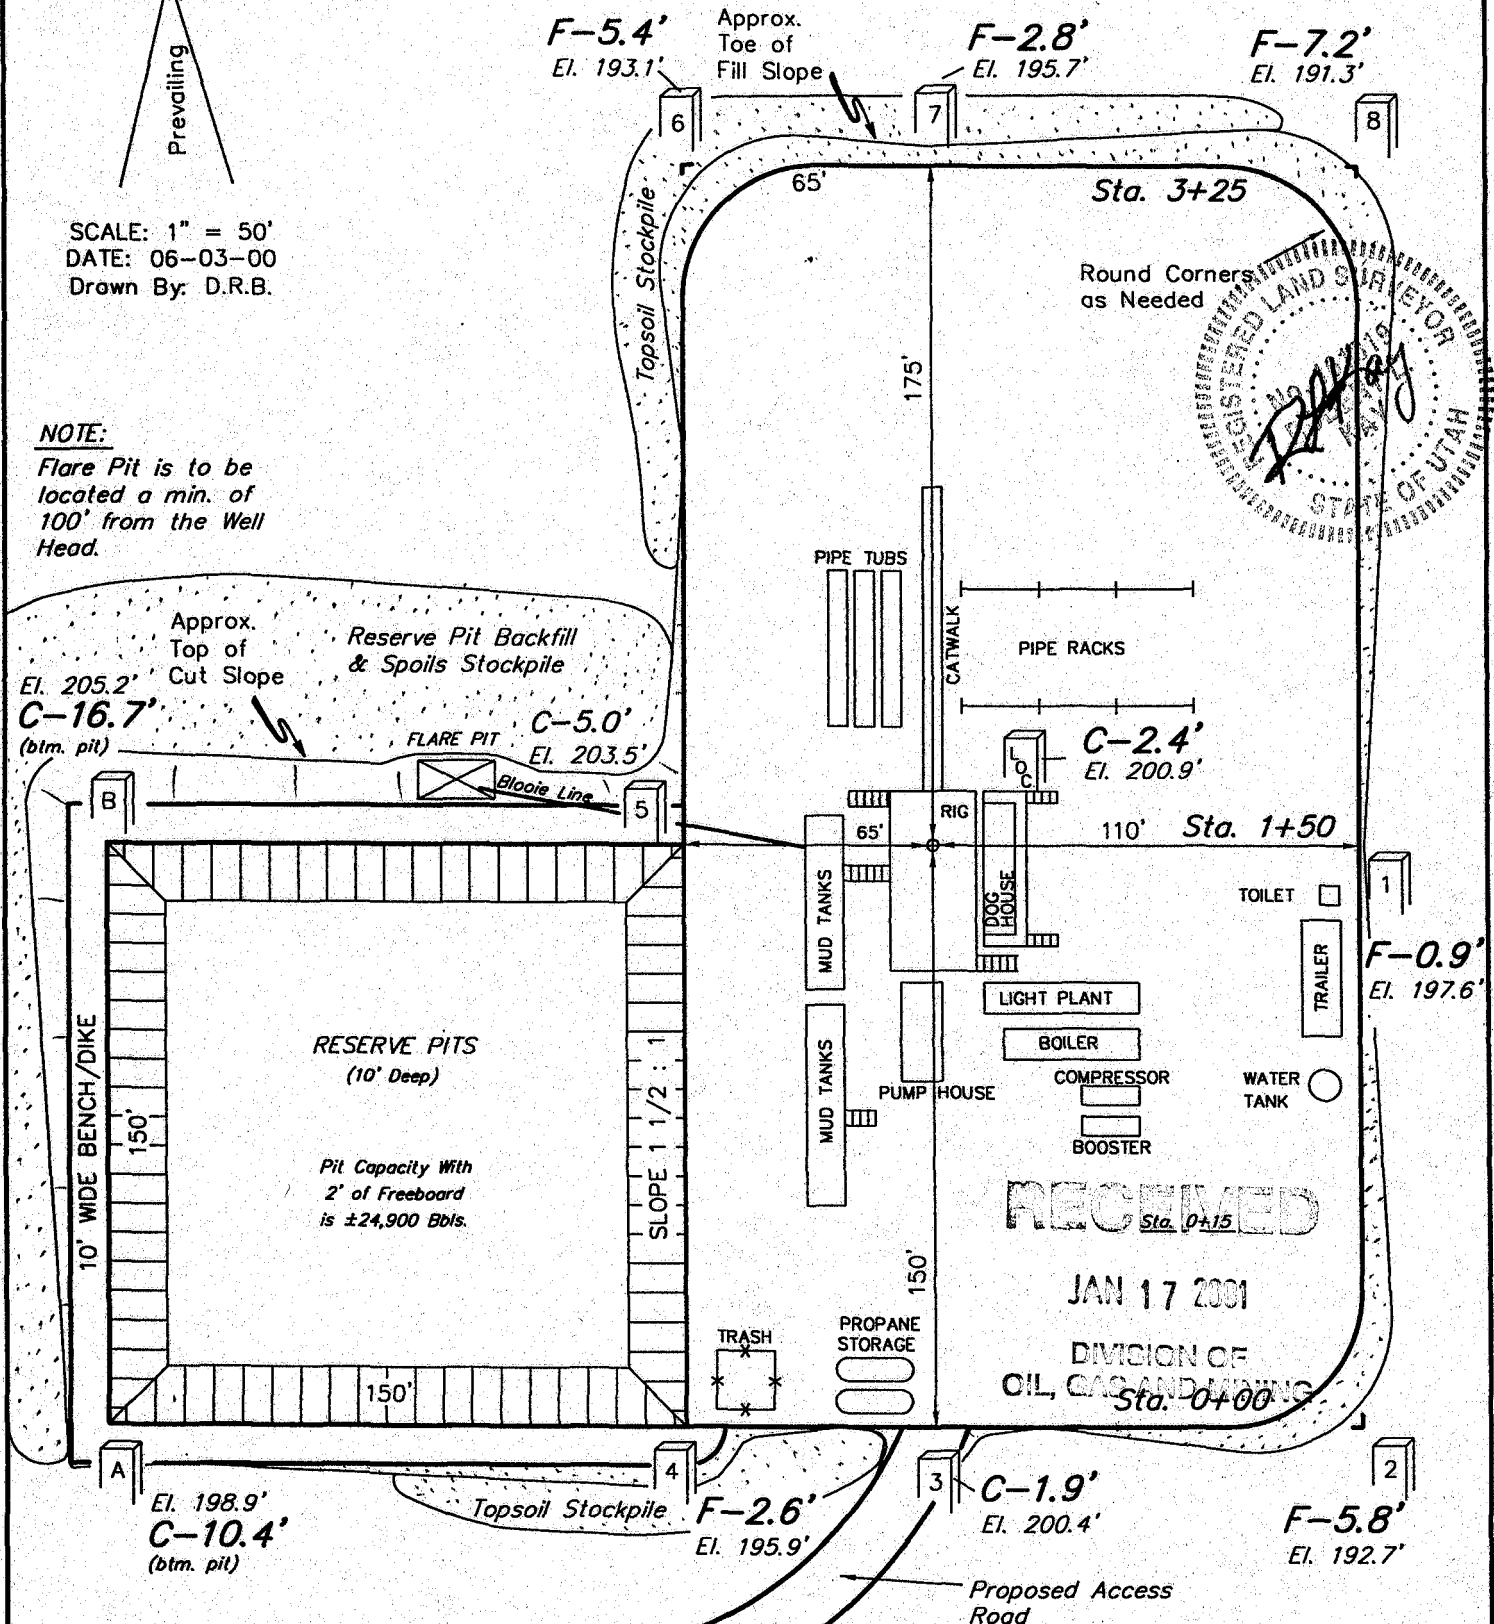

Elev. Ungraded Ground At Loc. Stake = 5200.9'

FINISHED GRADE ELEV. AT LOC. STAKE = 5198.5'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

COASTAL OIL & GAS CORP.

TYPICAL CROSS SECTIONS FOR

UTE TRIBAL #3-36

SECTION 36, T4S, R1E, U.S.B.&M.

84' FNL 1714' FWL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 06-03-00

Drawn By: D.R.B.

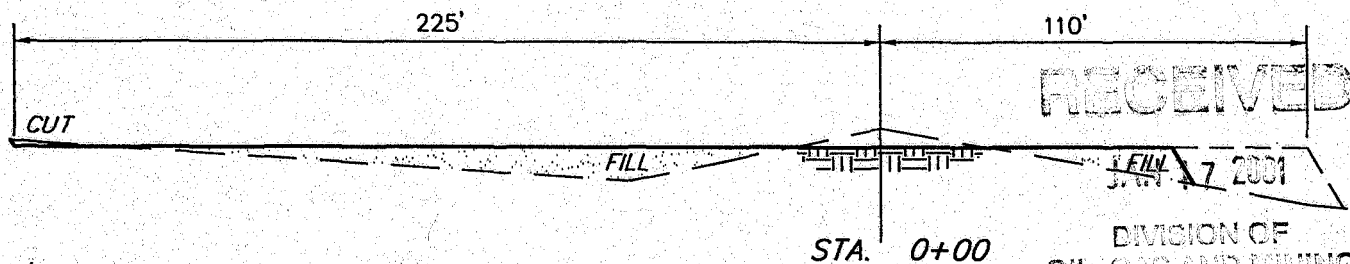
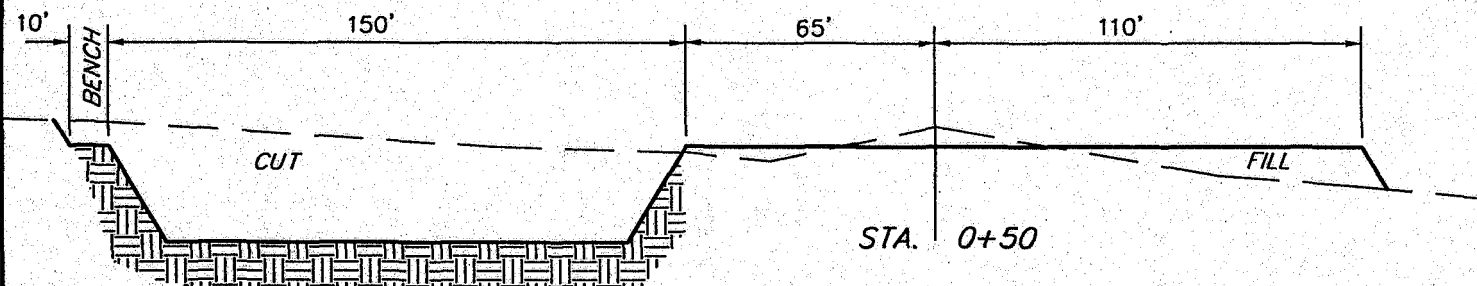
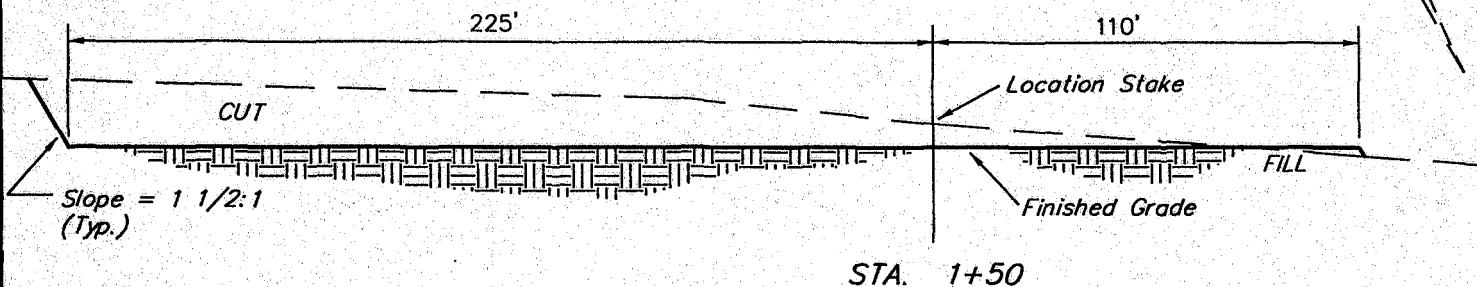
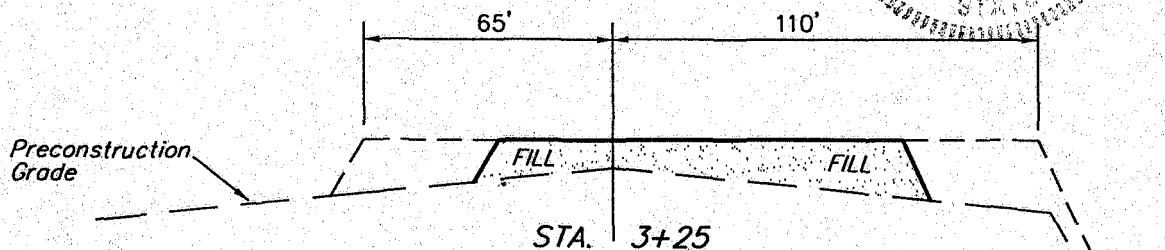



FIGURE #2



APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 3,120 Cu. Yds.
Remaining Location	= 8,770 Cu. Yds.
TOTAL CUT	= 11,890 CU.YDS.
FILL	= 5,110 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 6,510 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 6,510 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

3,000 PSI

BOF STACK

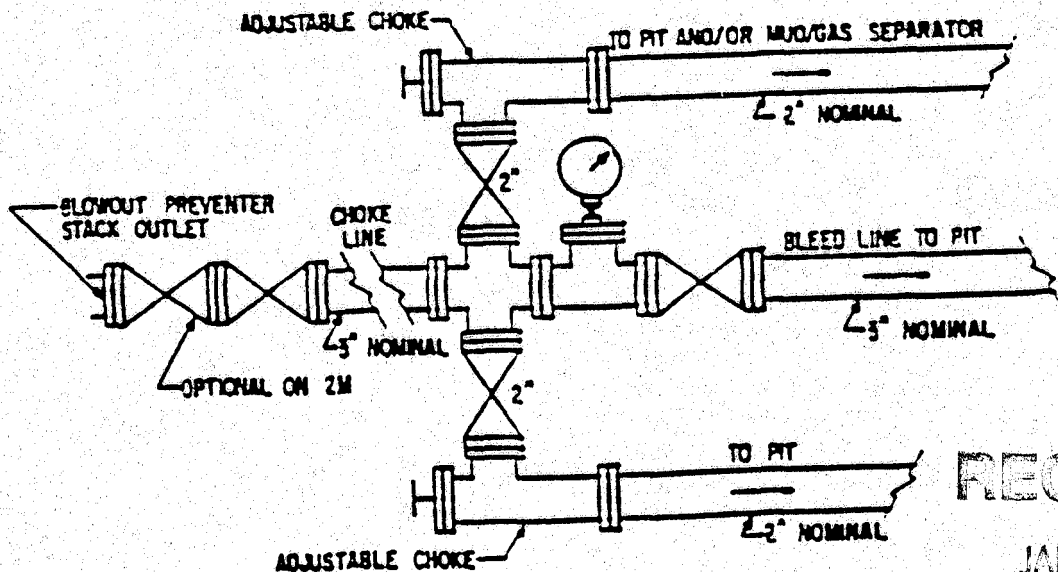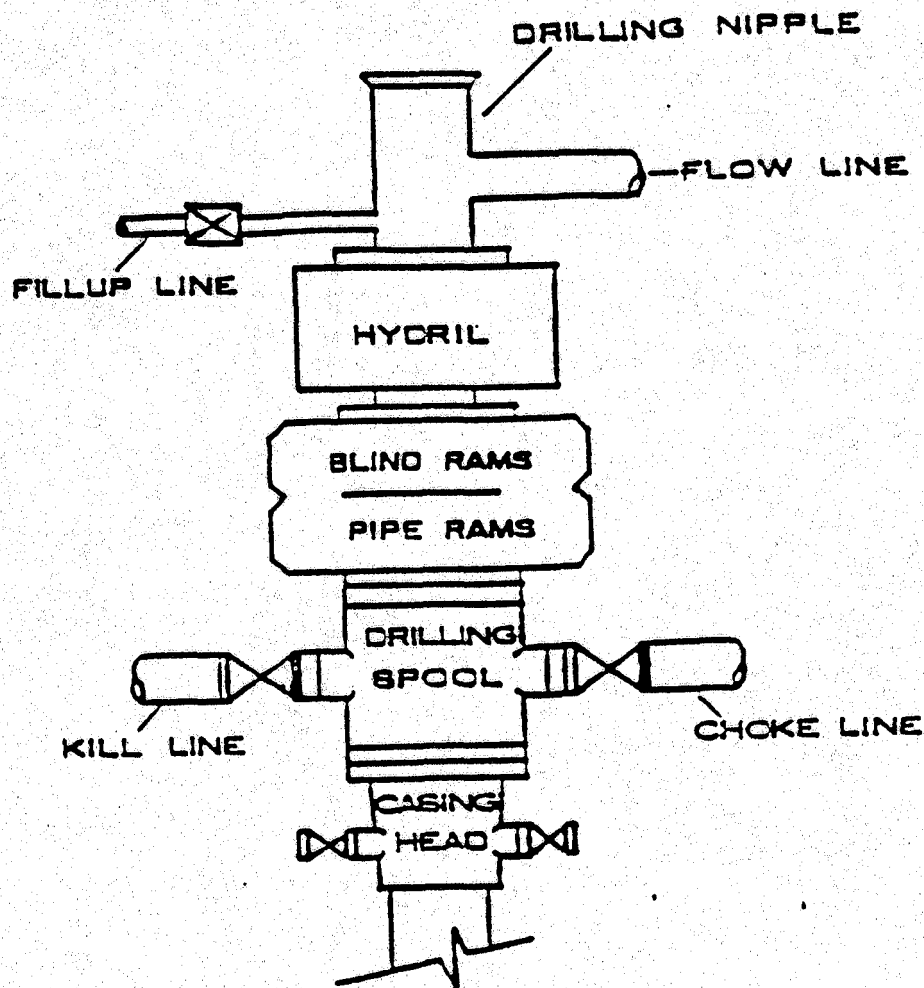

RECEIVED


JAN 17 2001

DIVISION OF
OIL, GAS AND MINING

COASTAL OIL & GAS CORPORATION

DRILLING PROGRAM

COMPANY NAME Coastal Oil & Gas Corporation DATE 1/12/01
WELL NAME Ute Tribal #3-36 TD 12,700' MD/TVD
FIELD Leland Bench COUNTY Uintah STATE Utah ELEVATION 5,216' KB
SURFACE LOCATION Section 36, T4S-R1E BHL Straight Hole
OBJECTIVE ZONE(S) Lower Green River, Wasatch, Mesaverde
ADDITIONAL INFO

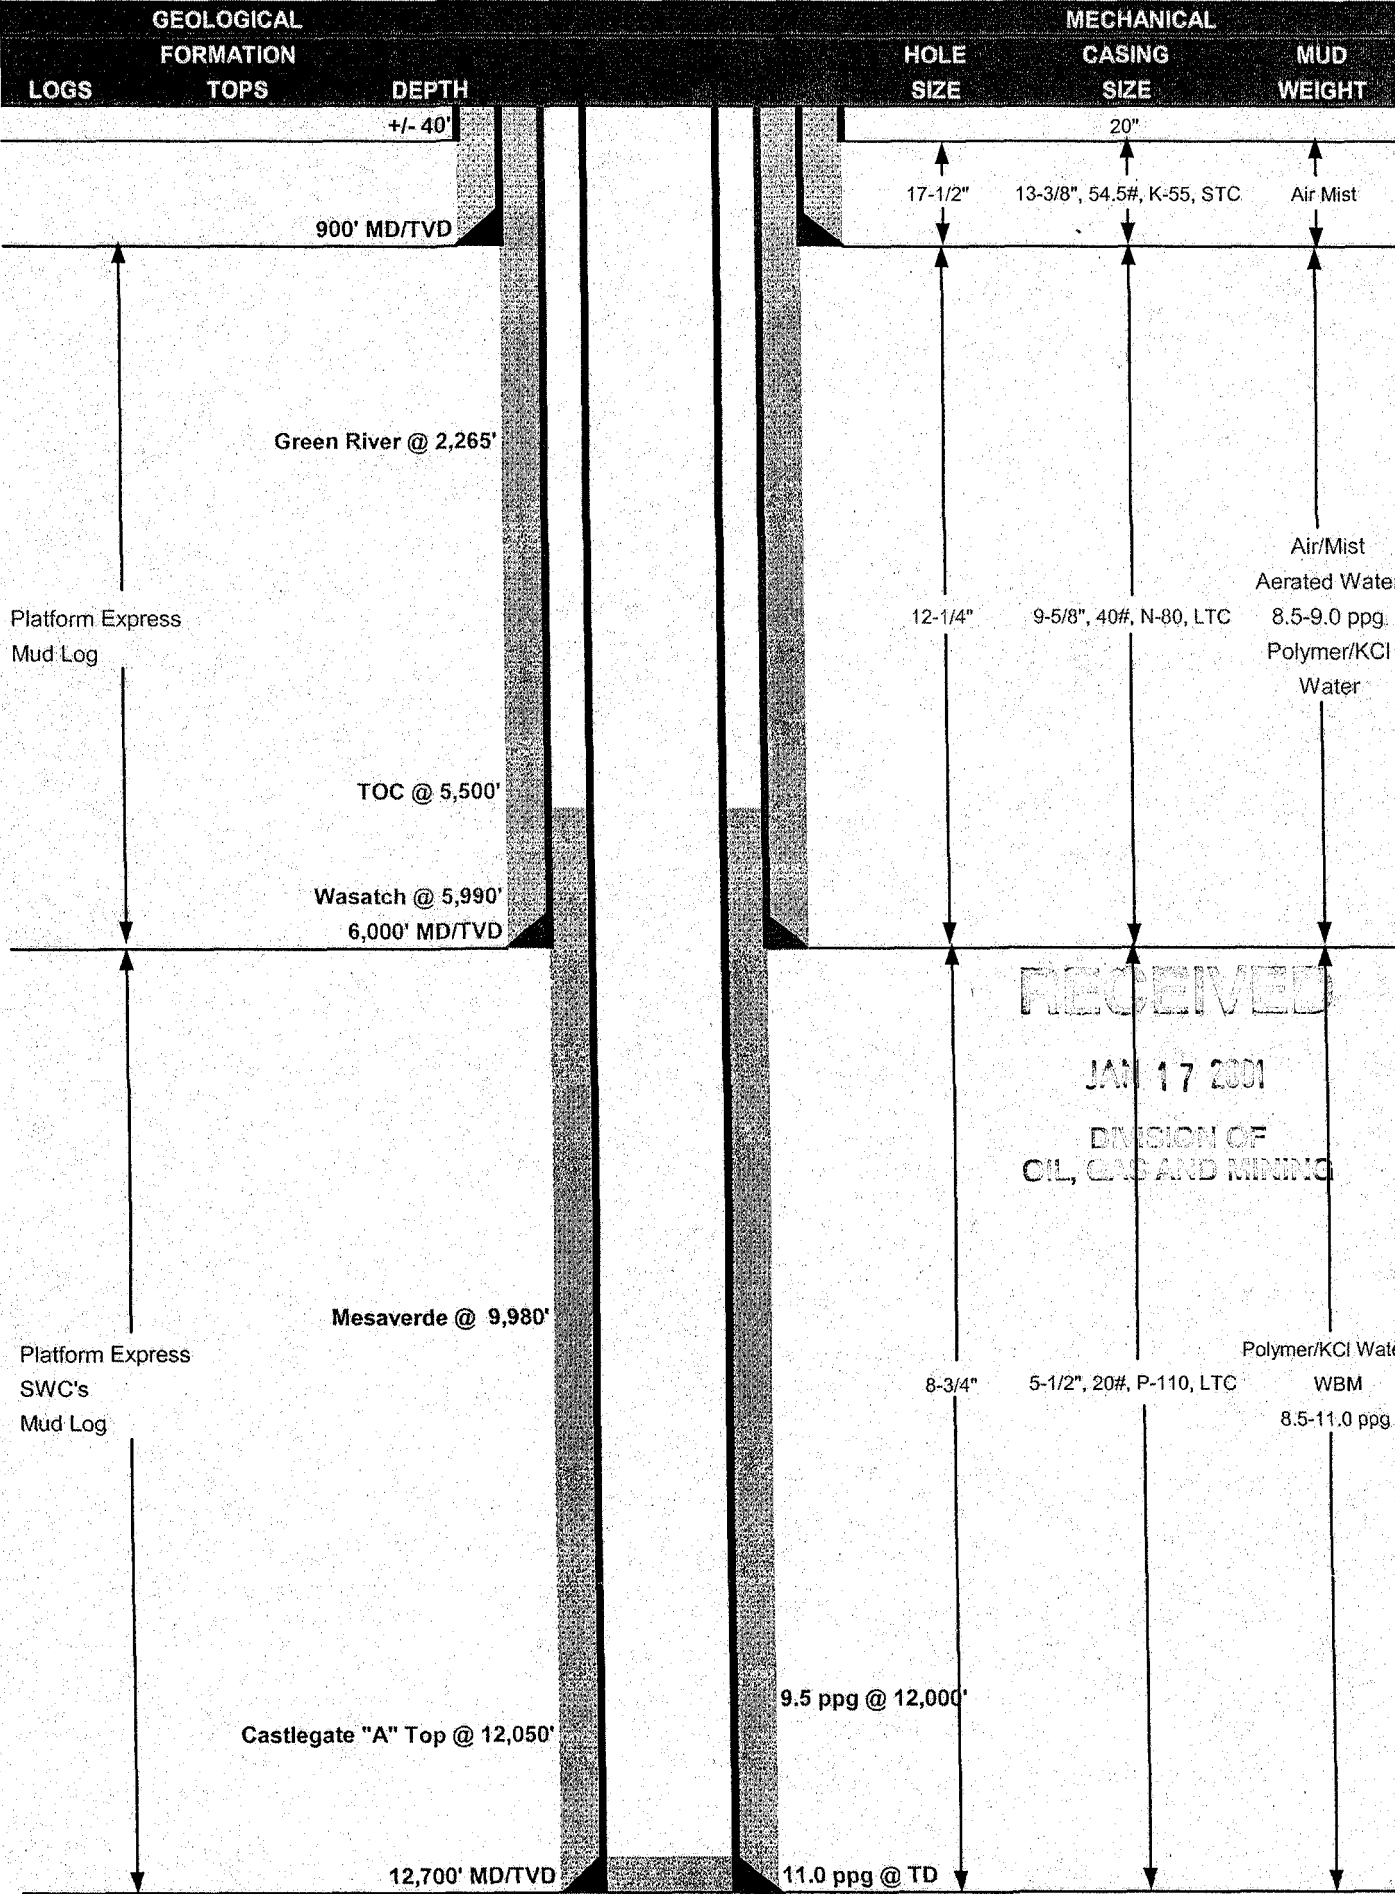

COASTAL OIL & GAS CORPORATION
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
SURFACE	13-3/8"	0-250'	54.5#	K-55	STC	2,730	1,130	547,000
						5.41	2.68	3.67
INTERMEDIATE	9-5/8"	0 - 6,000'	40#	N-80	LTC	5750	3090	737,000
						1.48	1.56	2.17
PRODUCTION	5-1/2"	0-TD	20#	P-110	LTC	12,630	11,100	548,000
						2.18	1.53	1.55

- 1) Maximum Anticipated Surface Pressure (MASP) (Conductor and Surface Casings) = (Frac Gradient at Shoe - Gas Gradient (0.115 psi/ft))(TVD)
- 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (Gas Gradient x TVD of Next Casing Point x 0.67) - (Mud Weight x TVD x 0.052 x 0.33)
- 3) MASP (Prod Casing) = Pore Pressure - (Gas Gradient x TVD of Production Interval)
- (Burst Assumptions: FG @ 13-3/8" shoe = 13.0 ppg, Max Pore Pressure = 11 ppg, Max MW = 11 ppg)
- (Collapse Assumption Srf/Prdn: Fully Evacuated Casing, Max MW; Int: 1/3 evacuation of next long string casing point, Max MW)
- (Tension Assumptions: Air Weight of Casing, 100,000 lbs overpull)

CEMENT PROGRAM


		FT. OF FILL	DESCRIPTION	SACKS	EXCESS*	WEIGHT	YIELD
SURFACE		900'	Class G + Additives	820	50%	15.60	1.19
INTERMEDIATE	LEAD	5,000'	Premium Lite II HS + Additives	840	100%	11.00	3.45
	TAIL	1,000'	50/50 POZ + Additives	460	75%	14.50	1.24
PRODUCTION	TAIL	7,200'	50/50 POZ + Silica + Additives	2,460	75%	14.50	1.26

* or 30% over caliper

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 joint, float collar. Centralize first 3 joints & every other collar to surface. Thread lock FE up to and including pin end of float collar.
INTERMEDIATE	Guide shoe, 1 joint, float collar. Install 2 bow spring centralizers on the shoe joint and 1 on the next three joints, then 1 centralizer every third joint to top of tail cement. Thread lock FE up to and including pin end of FC.
PRODUCTION	Guide shoe, 1 joint, float collar. Install 2 bow spring centralizers on the shoe joint and 1 on the next three joints, then 1 centralizer every other joint to top of cement. Thread lock FE up to and including pin end of FC.

WELLHEAD EQUIPMENT

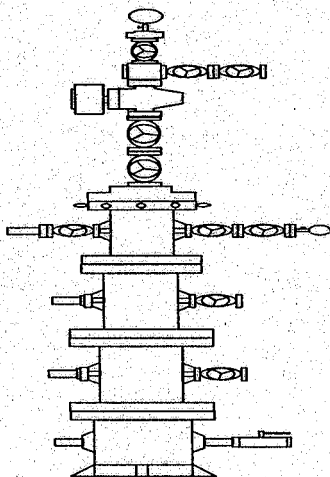

TREE	2-1/16" 10M
TUBING HEAD	11" 5M X 7-1/16" 10M
CASING SPOOL	
CASING SPOOL	13-5/8" 3M X 11" 5M
CASING HEAD	13-3/8" SOW X 13-5/8" 3M

RECEIVED
JAN 17 2001
DIVISION OF
OIL, GAS AND MINING

COASTAL OIL & GAS CORP.

UTE TRIBAL #3-36

LOCATED IN UTAH COUNTY, UTAH

SECTION 36, T4S, R1E, U.S.B.&M.

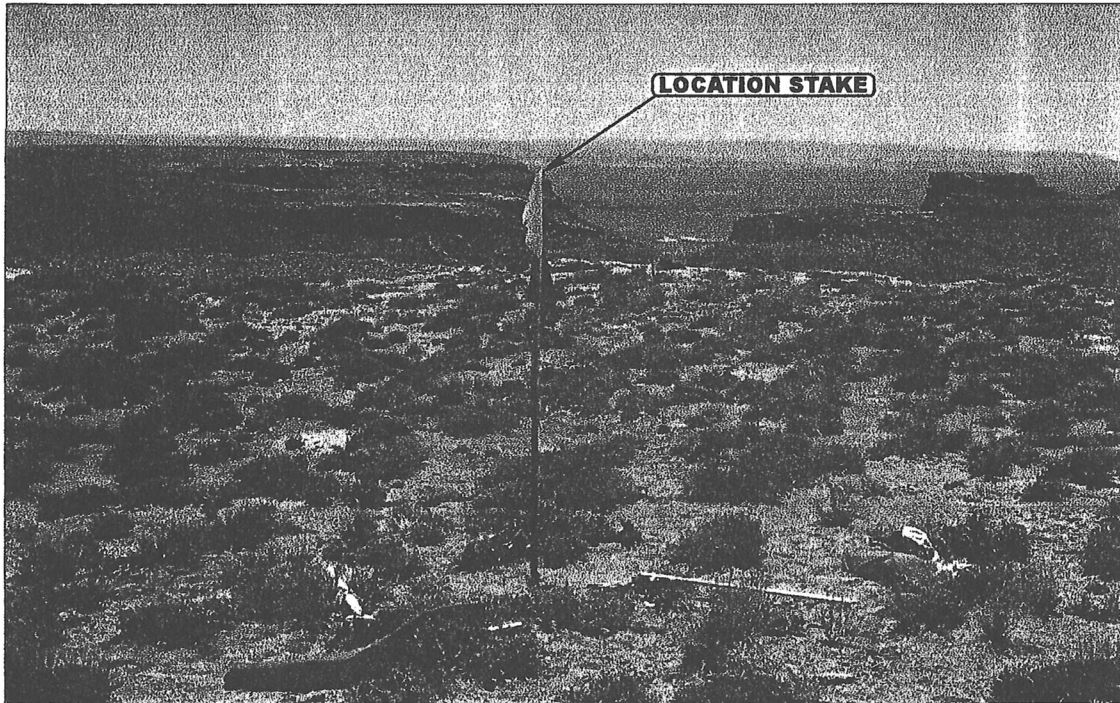


PHOTO: VIEW OF LOCATION STAKE

CAMERA ANGLE: SOUTHERLY

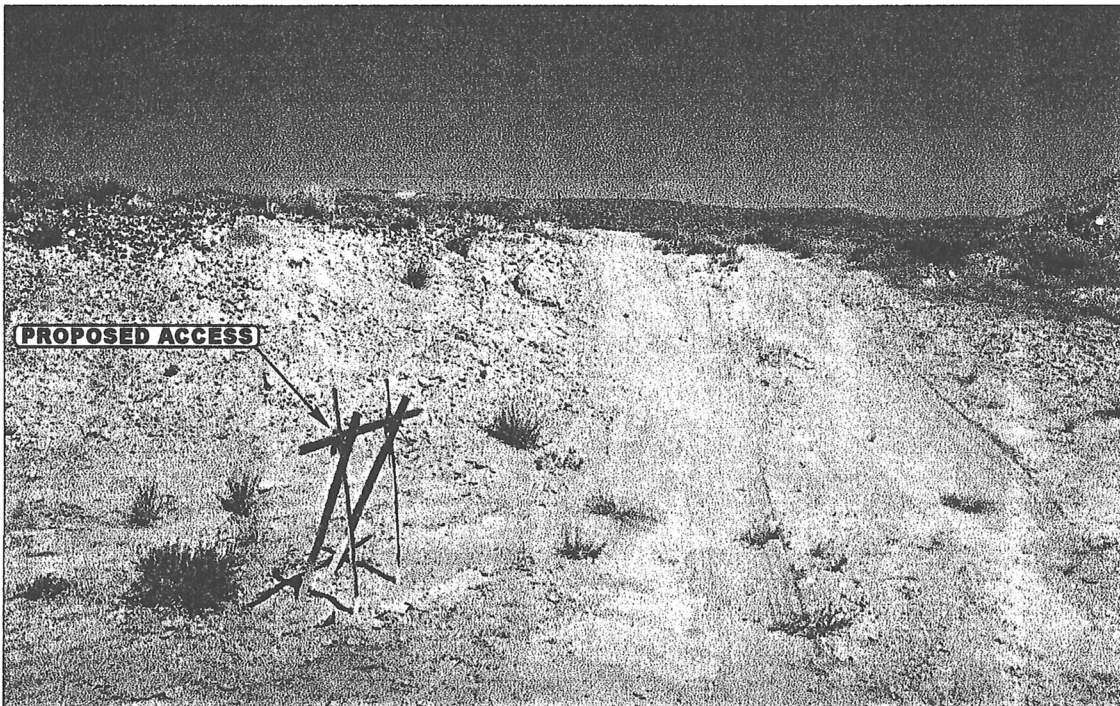


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: EASTERLY



- Since 1964 -

UELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

6 20 00
MONTH DAY YEAR

PHOTO

TAKEN BY: J.F.

DRAWN BY: C.G.

REVISED: 00-00-00

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 01/17/2001

API NO. ASSIGNED: 43-047-33867

WELL NAME: UTE TRIBAL 3-36
OPERATOR: COASTAL OIL & GAS CORP (N0230)
CONTACT: CHERYL CAMERON

PHONE NUMBER: 435-781-7023

PROPOSED LOCATION:
NENW 36 040S 010E
SURFACE: 0082 FNL 1714 FWL
BOTTOM: 0082 FNL 1714 FWL
UINTAH
WINDY RIDGE EAST (753)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2-Indian
LEASE NUMBER: 14-20-H62-4908
SURFACE OWNER: 2-Indian


PROPOSED FORMATION: ~~MCS~~ MVRD

RECEIVED AND/OR REVIEWED:
☒ Plat
☒ Bond: Fed[] Ind[☒2] Sta[] Fee[]
(No. 114066-A)
☐ Potash (Y/N)
☐ Oil Shale (Y/N) *190-5 (B) or 190-3
☒ Water Permit
(No. 43-8496)
☐ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:
☐ R649-2-3. Unit
☐ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
☒ R649-3-3. Exception
☐ Drilling Unit
Board Cause No:
Eff Date:
Siting:
☐ R649-3-11. Directional Drill

COMMENTS: Need add'l info "Ex. Loc." (rec'd 2-2-01)

STIPULATIONS: ① FEDERAL APPROVAL

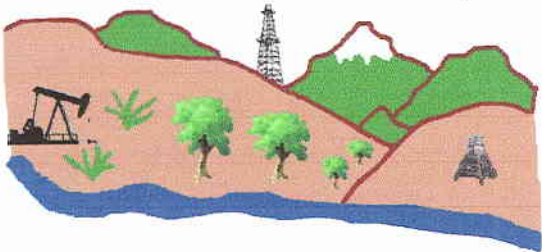


Utah Oil Gas and Mining

OPERATOR: COASTAL O&G CORP (N0230)

FIELD: WINDY RIDGE EAST (753)

SEC. 36, T4S, R1E,

COUNTY: UINTAH SPACING: R649-3-3/EX LOC

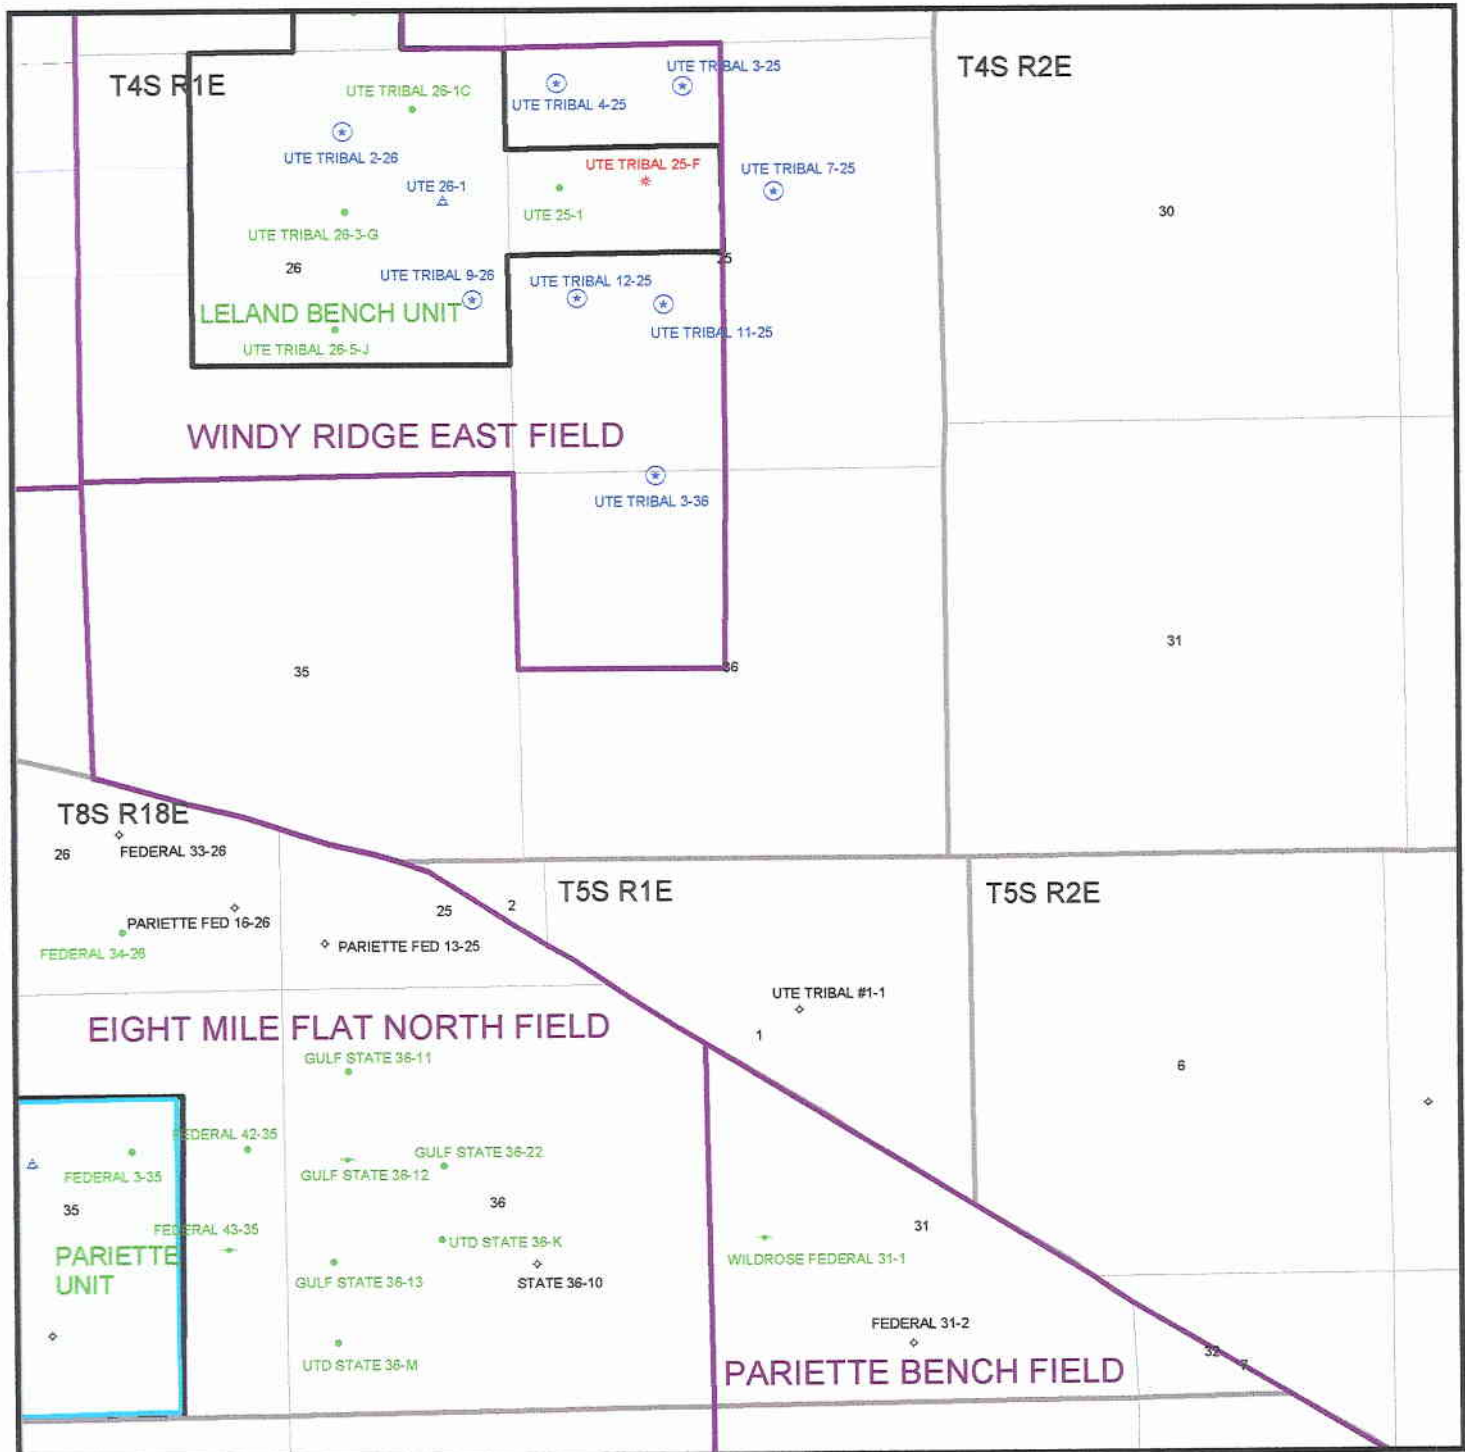



January 29, 2001

State of Utah
Division of Oil, Gas & Mining
1594 W. North Temple, Suite 12010
Salt Lake City, Utah 84180

Attention: Ms. Lisha Cordova

Re: Permit To Drill
Coastal Ute Tribal #3-36
NE/4 NW/4 Section 36-4S-1E
Uintah County, Utah

Madam:

Coastal Oil & Gas Corporation has staked the Coastal Ute Tribal #3-36 well in the NE/4 NW/4 of Section 36, Township 4 South, Range 1 East, USB&M, Uintah County, Utah. This well is staked 1714 feet from the west line and 82 feet from the north line of said section 36. The permit to drill is for a Mesa Verde formation test, which is subject to Oil and Gas Conservation General Rule R649-3-2 Location and Siting of Wells. Because this well location was moved due to vegetation, this location as staked does not conform to rule R649-3-2.

Coastal Oil & Gas Corporation here requests that a permit to drill the Coastal Ute Tribal #3-36 well at a location 1714 feet from west line and 82 feet from north line of Section 36, Township 4 South, Range 1 East, USB&M be granted administratively under rule R649-3-2. Coastal is the owner of all oil and gas leasehold within a 460-foot radius of the proposed location.

Very truly yours,

Ronald T. Halfacre
Senior Staff Landman
713-877-3146

RECEIVED
FEB 02 2001
DIVISION OF
OIL, GAS AND MINING



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

February 5, 2001

Coastal Oil & Gas Corporation
PO Box 1148
Vernal, UT 84078

Re: Ute Tribal 3-36 Well, 82' FNL, 1714' FWL, NE NW, Sec. 36, T. 4 South, R. 1 East,
Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-33867.

Sincerely,

A handwritten signature in cursive script, appearing to read 'J. R. Baza'.

John R. Baza
Associate Director

er
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Coastal Oil & Gas Corporation
Well Name & Number Ute Tribal 3-36
API Number: 43-047-33867
Lease: 14-20-H62-4908

Location: NE NW Sec. 36 T. 4 South R. 1 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0136
Expires: November 30, 2000


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 14-20-H62-4908
1b. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name Ute
2. Name of Operator Coastal Oil & Gas Corporation		7. Unit or CA Agreement Name and No. N/A
3a. Address P.O. Box 1148, Vernal, UT 84078	3b. Phone No. (include area code) (435) 781-7023	8. Lease Name and Well No. Ute Tribal #3-36
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface NE/NW At proposed prod. zone 82' FNL & 1714' FWL		9. API Well No. N/A
14. Distance in miles and direction from nearest town or post office* 13.9 Miles Southeast of Ft. Duchesne, UT		10. Field and Pool, or Exploratory Ieland Bench
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 390'	16. No. of Acres in lease 320	11. Sec., T., R., M., or Blk. and Survey or Area Sec. 36, T4S, R1E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Refer to Topo C	19. Proposed Depth 15,000'	12. County or Parish Utah
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5200.9' Ungraded	22. Approximate date work will start* Upon Approval	13. State UT
20. BLM/BIA Bond No. on file BLM U-605382-9 BIA 114066-A		17. Spacing Unit dedicated to this well 40
23. Estimated duration To Be Determined		


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Cheryl Cameron	Date 1/16/01
---	---	------------------------

Sr. Regulatory Analyst

Approved by (Signature) 	Name (Printed/Typed) NOTICE OF APPROVAL	Date 03/07/2001
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on Reverse)

RECEIVED

MAR 09 2001

**DIVISION OF
OIL, GAS AND MINING**

00 AM

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Coastal Oil & Gas Corp.
Well Name & Number: Ute Tribal #3-36
API Number: 43-047-33867
Lease Number: 14-20-H62-4908
Location: NENW Sec. 36 T. 4S R. 1E
Agreement: N/A

RECEIVED

MAR 09 2001

DIVISION OF
OIL, GAS AND MINING

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to or Pete Sokolosky of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable.

2. Pressure Control Equipment

The variances requested in section 9 of the NBU Field SOP are granted with the following conditions:

Where the location and rig layout allows, the blooie line shall be straight and extend 100' from the wellbore. This requirement will be waived only in the case where the location is too small to accommodate it.

3. Casing Program and Auxiliary Equipment

None

4. Mud Program and Circulating Medium

None

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

6. Notifications of Operations

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

RECEIVED

MAR 09 2001

DIVISION OF
OIL, GAS AND MINING

7. Other Information

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman Petroleum Engineer	(435) 789-7077 (HOME)	(435) 646-1685 (PAGER)
Kirk Fleetwood Petroleum Engineer	(435) 789-6858 (HOME)	(435) 646-1678 (PAGER)
Jerry Kenczka Petroleum Engineer	(435) 781-1190 (HOME)	(435) 646-1676 (PAGER)
BLM FAX Machine	(435) 781-4410	

RECEIVED

MAR 09 2001

DIVISION OF
OIL, GAS AND MINING

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Coastal Oil and Gas Corporation (Coastal) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All Coastal personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

Coastal employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

Coastal employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

Coastal will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). Coastal shall receive written notification of authorization or denial of the requested modification. Without authorization, Coastal will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. Coastal shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified Archaeologist accompanied by a Tribal Technician will monitor any trenching required for the construction of the pipeline. Coastal is to inform contractors to maintain construction of the pipelines within approved 30 foot ROW.

A corridor ROW, 60 feet wide, shall be granted for the pipeline and a corridor ROW 30 feet wide shall be granted for the access road where it is separate from the pipeline. The constructed travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required. Upon completion of each pipeline in the corridor an adequate description of the pipeline will be filed with the Ute Tribe Energy & Minerals Department.

Upon completion of the pertinent APD and ROWs, Coastal will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

RECEIVED

MAR 09 2001

**DIVISION OF
OIL GAS AND MINING**

Coastal will implement "Safety and Emergency Plan" and ensure plan compliance.

Coastal shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontologic resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

Coastal employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontologic fossils. No significant cultural resources shall be disturbed.

Coastal will control noxious weeds on the well site and ROWs. Coastal will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. About 17 rods of fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The ROW will not be bladed or cleared of vegetation without authorization of the BIA. Where surface pipelines do not parallel roads but cross country between stations, they shall be welded in place at well sites or on access roads. They shall be pulled between stations with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, Coastal will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated by reseeding all disturbed areas.

RECEIVED

MAR 09 2001

DIVISION OF
OIL, GAS AND MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 8 South 1200 East CITY Vernal STATE Utah ZIP 84078		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: _____ QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: _____		8. WELL NAME and NUMBER: Exhibit "A"
PHONE NUMBER: 435-789-4433		9. API NUMBER:
COUNTY: _____		10. FIELD AND POOL, OR WILDCAT:
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Name Change
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.

See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation	
NAME (PLEASE PRINT) John T. Elzner	TITLE Vice President
SIGNATURE [Signature]	DATE 06-15-01
El Paso Production Oil & Gas Company	
NAME (PLEASE PRINT) John T. Elzner	TITLE Vice President
SIGNATURE [Signature]	DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

State of Delaware
Office of the Secretary of State

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

JUN 15 2001

DIVISION OF
OIL, GAS AND MINING



Harriet Smith Windsor
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION



David L. Siddall
Vice President

Attest:


Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

RECEIVED

JUL 12 2001

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTSL-065841
(UT-924)

JUL 10 2001

NOTICE

El Paso Production Oil & Gas Company : Oil and Gas
Nine Greenway Plaza :
Houston TX 77046-0095 :

Name Change Recognized


Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta
Acting Chief, Branch of
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

1112 copy



United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Uintah and Ouray Agency

P. O. Box 130

988 South 7500 East

Fort Duchesne, Utah 84026-0130

Phone: (435) 722-4300

Fax: (435) 722-2323

IN REPLY REFER TO:

Minerals and Mining

Phone: (435) 722-4310

Fax: (435) 722-2809

August 16, 2001

El Paso Production Company
Attn: Elizabeth R. Williams
Nine Greenway Plaza
Houston, TX 77046-0995

Dear Mrs. Williams:

We are in receipt of the corporate documentation for the name change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company.

All documents appear to be in order, and the approval is hereby authorized to change all records, including change of operator of certain oil and gas wells, Rights-of-Way, Communitization Agreements, Oil and Gas Leases, Exploration and Development Agreements, etc. from Coastal Oil & Gas Corporation to "El Paso Production Oil and Gas Company".

Approval of this name change is August 16, 2001, but effective on March 9, 2001. If you have any questions, please do not hesitate to contact this office.

Respectfully,

Acting Superintendent

RECEIVED

AUG 22 2001

DIVISION OF
OIL, GAS AND MINING

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH		4-KAS
2. CDW	✓	5-LP ✓
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

007

Operator Name Change (Only)

X Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001****FROM:** (Old Operator):

COASTAL OIL & GAS CORPORATION
 Address: 9 GREENWAY PLAZA STE 2721
 HOUSTON, TX 77046-0995
 Phone: 1-(713)-418-4635
 Account N0230

TO: (New Operator):

EL PASO PRODUCTION OIL & GAS COMPANY
 Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
 HOUSTON, TX 77046-0995
 Phone: 1-(832)-676-4721
 Account N1845

CA No.

Unit:

WELL(S)

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
SHELL UTE TRIBAL 1-08A1E	43-047-30173	1846	08-01S-01E	INDIAN	OW	P
UTE TRIBAL 3-25	43-047-33540	99999	25-04S-01E	INDIAN	OW	APD
UTE TRIBAL 4-25	43-047-33541	13041	25-04S-01E	INDIAN	OW	P
UTE TRIBAL 7-25	43-047-33542	12999	25-04S-01E	INDIAN	OW	P
UTE TRIBAL 11-25	43-047-33551	12989	25-04S-01E	INDIAN	OW	P
UTE TRIBAL 12-25	43-047-33544	12990	25-04S-01E	INDIAN	OW	P
UTE 27-1	43-047-31942	11221	27-04S-01E	INDIAN	OW	P
UTE TRIBAL 3-36	43-047-33867	99999	36-04S-01E	INDIAN	OW	APD
WYASKET 33 26 (CR-172)	43-047-30907	170	33-08S-20E	INDIAN	GW	P
WYASKET 33-105	43-047-33408	99999	33-08S-20E	INDIAN	GW	APD
WYASKET 33-106 (CR-172)	43-047-33409	99999	33-08S-20E	INDIAN	GW	APD
IGNACIO 33-107	43-047-33674	13270	33-08S-20E	INDIAN	GW	DRL
TABBEE 34 20 (9C-207)	43-047-30734	115	34-08S-20E	INDIAN	GW	S
D M ICE FRIDAY 34 22 (9C-207)	43-047-30753	125	34-08S-20E	INDIAN	GW	S
TABBEE 34-108 (9C-207)	43-047-33410	12684	34-08S-20E	INDIAN	GW	P
TABBEE 34-109 (9C-208)	43-047-33411	13017	34-08S-20E	INDIAN	GW	P
TABBEE 34-110 (9C-208)	43-047-33412	99999	34-08S-20E	INDIAN	GW	APD
UTE TRIBAL 35 16 (9C-184)	43-047-30666	140	35-08S-20E	INDIAN	GW	P
UTE TRIBAL 35-111 (9C-184)	43-047-33394	99999	35-08S-20E	INDIAN	GW	APD
UTE TRIBAL 35-112 (9C-184)	43-047-33395	99999	35-08S-20E	INDIAN	GW	APD

OPERATOR CHANGES DOCUMENTATION

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
4. Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 08/16/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 08/16/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 08/30/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/30/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

STATE BOND VERIFICATION:

1. State well(s) covered by Bond No.: N/A

FEDERAL BOND VERIFICATION:

1. Federal well(s) covered by Bond No.: N/A

INDIAN BOND VERIFICATION:

1. Indian well(s) covered by Bond No.: 103601473

FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

FILMING:

1. All attachments to this form have been **MICROFILMED** on: _____

FILING:

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filled in each well file on: _____

COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".



WESTPORT OIL AND GAS COMPANY, L.P.

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Debby J. Black
Engineer Technician

Encl:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

008

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

El Paso Production Oil & Gas Company

3a. Address

P.O. Box 1148 Vernal, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NENW Section 36-T4S-R1E 82'FNL & 1714'FWL

5. Lease Serial No.

14-20-H62-4908

6. If Indian, Allottee or Tribe Name

Ute Tribe

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Ute Tribal #3-36

9. API Well No.

43-047-33867

10. Field and Pool, or Exploratory Area

Leland Bench

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- | | | | |
|---|---|--|---|
| <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input checked="" type="checkbox"/> Other |
| <input type="checkbox"/> Change Plans | <input type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon | APD Extension |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | |

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

The operator requests that the APD for the subject well be extended for an additional year so that drilling operations may be completed.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-04-02
By: [Signature]

RECEIVED

JAN 31 2002

DIVISION OF
OIL, GAS AND MINING

COPY SENT TO OPERATOR
Date: 02-04-02
Initials: CHD

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Upchego

Title

Regulatory Analyst

Date

January 30, 2002

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:
3106
UTU-25566 et al
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

009

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other
2. Name of Operator
El Paso Production Oil & Gas Company

3a. Address
P.O. Box 1148 Vernal, UT 84078
3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

NENW Section 36-T4S-R1E 82'FNL & 1714'FWL

5. Lease Serial No.
14-20-H62-4908
6. If Indian, Allottee or Tribe Name
Ute Tribe
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No.
Ute Tribal #3-36
9. API Well No.
43-047-33867
10. Field and Pool, or Exploratory Area
Leland Bench
11. County or Parish, State
Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	BLM APD Extension
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

The operator requests that the APD for the subject well be extended for an additional year so that drilling operations may be completed.

RECEIVED
FEB 25 2002

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Upchego

Title

Regulatory Analyst

Signature

Date

February 19, 2002

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Petroleum Engineer

Date

3/1/02

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

MAR 19 2002

DIVISION OF
OIL, GAS AND MINING

Dobm

El Paso Production
APD Extension

Well: Ute Tribal 3-36

Location: NENW Sec. 36, T4S, R1E

Lease: 1420-H62-4908

Conditions of Approval

An extension for the referenced APD is granted with the following condition(s):

1. The extension will expire 3/7/03
2. No other extensions beyond that time frame will be granted or allowed.

If you have any other questions concerning this matter, please contact Kirk Fleetwood at (435) 781-4486.

RECEIVED

MAR 19 2002

DIVISION OF
OIL, GAS AND MINING

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.


We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chrono





United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:
Real Estate Services

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

ACTING

Director, Office of Trust Responsibilities

Enclosure

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☐

OTHER _____

8. WELL NAME and NUMBER:

Exhibit "A"

2. NAME OF OPERATOR:

El Paso Production Oil & Gas Company

9. API NUMBER:

3. ADDRESS OF OPERATOR:

9 Greenway Plaza

City Houston

State TX

Zip 77064-0995

PHONE NUMBER:

(832) 676-5933

10. FIELD AND POOL, OR WILDCAT:

4. LOCATION OF WELL

FOOTAGES AT SURFACE:

COUNTY:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐

NOTICE OF INTENT
(Submit in Duplicate)

Approximate date work will start:

☐

SUBSEQUENT REPORT
(Submit Original Form Only)

Date of work completion:

☐

ACIDIZE

☐

ALTER CASING

☐

CASING REPAIR

☐

CHANGE TO PREVIOUS PLANS

☐

CHANGE TUBING

☐

CHANGE WELL NAME

☐

CHANGE WELL STATUS

☐

COMMINGLE PRODUCING FORMATIONS

☐

CONVERT WELL TYPE

☐

DEEPEN

☐

FRACTURE TREAT

☐

NEW CONSTRUCTION

☒

OPERATOR CHANGE

☐

PLUG AND ABANDON

☐

PLUG BACK

☐

PRODUCTION (START/RESUME)

☐

RECLAMATION OF WELL SITE

☐

RECOMPLETE - DIFFERENT FORMATION

☐

REPERFORATE CURRENT FORMATION

☐

SIDETRACK TO REPAIR WELL

☐

TEMPORARILY ABANDON

☐

TUBING REPAIR

☐

VENT OR FLARE

☐

WATER DISPOSAL

☐

WATER SHUT-OFF

☐

OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____

State Surety Bond No. RLB0005236

Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By: _____

Jon R. Nelsen, Attorney-in-Fact

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.

NAME (PLEASE PRINT)

David R. Dix

TITLE

Agent and Attorney-in-Fact

SIGNATURE

DATE

12/17/02

(This space for State use only)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED EXHIBIT "A"

5. Lease Serial No.
SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SEE ATTACHED EXHIBIT "A"

9. API Well No.
SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- | | | | |
|---|---|--|---|
| <input type="checkbox"/> Acidize | <input type="checkbox"/> Deepen | <input type="checkbox"/> Production (Start/Resume) | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Alter Casing | <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Reclamation | <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> New Construction | <input type="checkbox"/> Recomplete | <input checked="" type="checkbox"/> Other |
| <input type="checkbox"/> Change Plans | <input type="checkbox"/> Plug and Abandon | <input type="checkbox"/> Temporarily Abandon | SUCCESSOR OF |
| <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back | <input type="checkbox"/> Water Disposal | OPERATOR |

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed when testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Signature

Title

OPERATIONS

Date

March 4, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

011

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT – for such proposals		6. Lease Designation and Serial Number 14-20-H62-4908
		7. Indian Allottee or Tribe Name Ute Tribe
		8. Unit or Communitization Agreement
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other (specify)		9. Well Name and Number Ute Tribal 3-36
2. Name of Operator El Paso Production Oil & Gas Company		10. API Well Number 43-047-33867
3. Address of Operator P.O. Box 120, Altamont, UT 84001	4. Telephone Number 435-454-3394	11. Field and Pool, or Wildcat Leland Bench
5. Location of Well Footage : 82' FNL & 1714' FWL County : Uintah QQ, Sec, T., R., M : NENW, Sec. 36, T4S, R1E State : Utah		
12. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		

NOTICE OF INTENT
 (Submit in Duplicate)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Recompletion |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Multiple Completion | <input type="checkbox"/> Water Shut-Off |
| <input checked="" type="checkbox"/> Other <u>APD Extension</u> | |

Approximate Date Work Will Start _____

SUBSEQUENT REPORT
 (Submit Original Form Only)

- | | |
|--|---|
| <input type="checkbox"/> Abandonment * | <input type="checkbox"/> New Construction |
| <input type="checkbox"/> Casing Repair | <input type="checkbox"/> Pull or Alter Casing |
| <input type="checkbox"/> Change of Plans | <input type="checkbox"/> Shoot or Acidize |
| <input type="checkbox"/> Conversion to Injection | <input type="checkbox"/> Vent or Flare |
| <input type="checkbox"/> Fracture Treat | <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Other _____ | |

Date of Work Completion _____

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form.

* Must be accompanied by a cement verification report.

13. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

THE OPERATOR REQUESTS THAT THE APD FOR THE SUBJECT WELL BE EXTENDED FOR AN ADDITIONAL YEAR.

COPY SENT TO OPERATOR

 Date: 03-13-03

 Initials: CHD

**Approved by the
 Utah Division of
 Oil, Gas and Mining**

 Date: 03-12-03

 By: [Signature]
RECEIVED
MAR 12 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Name & Signature

Margie Herrmann

Title

Regulatory

Date

03/10/03

(State Use Only)

OPERATOR CHANGE WORKSHEET

010

ROUTING

1. GLH	
2. CDW	<input checked="" type="checkbox"/>
3. FILE	

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: 12-17-02

FROM: (Old Operator):	TO: (New Operator):
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

CA No.

Unit:

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SW HANGING ROCK FED 23-1	23-12S-23E	43-047-34231	99999	FEDERAL	GW	APD
SW HANGING ROCK FED 24-1	24-12S-23E	43-047-34232	99999	FEDERAL	GW	APD
SW HANGING ROCK FED 25-1	25-12S-23E	43-047-34233	99999	FEDERAL	GW	APD
UTE TRIBAL 14-23	23-04S-01E	43-047-33834	99999	INDIAN	OW	APD
UTE TRIBAL 3-25	25-04S-01E	43-047-33540	99999	INDIAN	OW	APD
UTE TRIBAL 15-25	25-04S-01E	43-047-33834	99999	INDIAN	GW	APD
UTE TRIBAL 2-25	25-04S-01E	43-047-34431	99999	INDIAN	GW	APD
UTE TRIBAL 10-25	25-04S-01E	43-047-34435	99999	INDIAN	GW	APD
UTE TRIBAL 3-26	26-04S-01E	43-047-34724	99999	INDIAN	OW	APD
UTE TRIBAL 11-26	26-04S-01E	43-047-34731	99999	INDIAN	OW	APD
UTE TRIBAL 4-26	26-04S-01E	43-047-34732	99999	INDIAN	OW	APD
UTE TRIBAL 5-26	26-04S-01E	43-047-34733	99999	INDIAN	OW	APD
UTE TRIBAL 6-26	26-04S-01E	43-047-34734	99999	INDIAN	OW	APD
UTE TRIBAL 12-26	26-04S-01E	43-047-34746	99999	INDIAN	OW	APD
UTE TRIBAL 3-36	36-04S-01E	43-047-33867	99999	INDIAN	OW	APD
ANKERPONT 35-224	35-08S-21E	43-047-34736	99999	INDIAN	GW	NEW
ARCHEE 1-118	01-09S-20E	43-047-34825	99999	INDIAN	GW	NEW
BAYLESS ST 2-2	02-09S-20E	43-047-34904	99999	STATE	GW	APD
BAYLESS ST 2-3	02-09S-20E	43-047-34905	99999	STATE	GW	APD
NBU 393	22-09S-20E	43-047-34864	99999	FEDERAL	GW	APD
NBU 392	22-09S-20E	43-047-34877	99999	FEDERAL	GW	APD

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181

5. If NO, the operator was contacted on: _____

6. (R649-9-2) Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: 01/09/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 03/27/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/27/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A
The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Vernal Field Office

170 South 500 East

Vernal, Utah 84078-2799

<http://www.blm.gov/utah/vernal>

Phone: (435) 781-4400

Fax: (435) 781-4410

IN REPLY REFER TO:

3160

UT08300

June 4, 2003

Margie Herrmann
El Paso Production Oil & Gas Co.
P. O. Box 120
Altamont, Utah 84001

Re: Notification of Expiration
Well No. Ute Tribal 3-36
NENW, Sec. 36, T4S, R1E
Uintah County, Utah
Lease No. 14-20-H62-4908

Dear Margie:

The Application for Permit to Drill the above-referenced well was approved on March 7, 2001. A one (1) year extension of the original APD was requested. The request was reviewed and the extension approved until March 7, 2003. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

Sincerely,

Leslie Walker
Legal Instruments Examiner

cc: UDOGM – Diana Mason

RECEIVED

JUN 11 2003

DIV. OF OIL, GAS & MINING



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

June 16, 2003

Margie Herrmann
El Paso Production Oil & Gas Company
P. O. Box 120
Altamont, Utah 84001

Re: APD Rescinded – Ute Tribal 3-36, Sec.36, T.4S, R.1E – Uintah County, Utah,
API No. 43-047-33867

Dear Ms. Herrmann:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on February 5, 2001. On February 4, 2002, the Division granted a one-year APD extension. On June 11, 2003, the Division received a letter from the Bureau of Land Management (BLM), which states that the permit filed with the BLM was being returned. I contacted you at that time and you requested that the APD filed with the Division be rescinded. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective June 11, 2003.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

A handwritten signature in black ink, appearing to read 'Diana Mason'.

Diana Mason
Engineering Technician

cc: Well File
Bureau of Land Management, Vernal